

Robus 400/600/1000

For sliding gates weighing up to 400 kg (RB400), up to 600 kg (RB600) and up to 1000 kg (RB1000)

Versions with electromechanical limit switch (RB400/RB600/RB1000) and with inductive limit switch (RB600P/RB1000P).

User-friendly: thanks to the BlueBUS system, allowing the control unit to be connected to up to 7 pairs of photocells and control, security and signalling devices with just two wires.

Practical: control unit and optional PS124 buffer batteries can be connected by means of practical guided - connector.

Advanced: RB400, RB600 and RB1000 are equipped with a temperature sensor: adapt the motor power to the climatic conditions and at the same time thermal cut-out. A master/slave selection automatically synchronises two motors. This means it is possible to automate 2-leaf sliding gates set opposite each other.

Intelligent: thanks to the obstacle detection system and automatic programming of the working times. Self-diagnosis by means of a flashing light. 8 programming levels.

Safe: acceleration and deceleration can be adjusted at the beginning and at the end of each opening and closing manoeuvre.

Sturdy: base and release in pressure die cast with easy to open handle.

Silent: gear motor on bearings.



Aluminium release handle for easy opening

Compartment for the pull-out control unit, protected by casing, and for buffer batteries

RB400

RB600/RB1000

Nice **BiDirectional products** indicate the status of the automations and confirm correct reception of the command.

Discover the complete range of BiDirectional products on page 176.

Yubii is the new Nice ecosystem that connects all the automations in the home.

Discover all the benefits of the Yubii system on page 168.

COMMON ACCESSORIES



CORE
Nice Wi-Fi-Radio
Gateway.
Pc./Pack 1



IBT4N
Interface for connecting
the O-View program-
ming unit.
Pc./Pack 1



BIDI-ZWAVE
Plug-in communica-
tion interface between
Z-Wave™ gateways and
Nice motors.
Pc./Pack 1



IT4WIFI
Smart Wi-Fi interface to
manage gates and
garage doors by smart-
phone (*).
Pc./Pack 1



RBA3
Spare control unit for
RB400, RB600/600P,
RB1000/1000P and
RUN1500/1500P.
Pc./Pack 1



PS124
24 V battery with inte-
grated battery charger.
Pc./Pack 1



RBA1
Inductive limit switch.
Pc./Pack 1



ROA6
M4 25x20x1000 mm
slotted nylon rack with
metal insert. For gates
weighing up to 500 kg.
Pc./Pack 10



ROA7
M4 rack, zinc coated,
22x22x1000 mm.
Pc./Pack 10



ROA8
M4 rack, 30x8x1000
mm, zinc coated with
spacers and screws.
Pc./Pack 10



TS
Signboard.
Pc./Pack 1




SOLEMYO KIT
The solar power to
automate gates, garage
doors or barrier gates.
See page 229.

TECHNICAL SPECIFICATIONS

Code	Description	Pack/Pallet
RB400	Irreversible, 24 Vdc, with incorporated control unit, with electromechanical limit switch, for gates up to 400 kg	15
RB600	Irreversible, 24 Vdc, with incorporated control unit, with electromechanical limit switch, for gates up to 600 kg	15
RB600P	Irreversible, 24 Vdc, with incorporated control unit, with inductive limit switch, for gates up to 600 kg	15
RB1000	Irreversible, 24 Vdc, with incorporated control unit, with electromechanical limit switch, for gates up to 1000 kg	15
RB1000P	Irreversible, 24 Vdc, with incorporated control unit, with inductive limit switch, for gates up to 1000 kg	15

Code	RB400	RB600/600P	RB1000/1000P
ELECTRICAL DATA			
Power supply (Vac 50/60 Hz)	230		
Absorption (A)	1,1	2,5	2,3
Power (W)	250	515	450
PERFORMANCE DATA			
Speed (m/s)	0,34	0,31	0,28
Force (N)	400	600	900
Work cycle (cycles/hour)	35	40	50
DIMENSIONAL AND GENERAL DATA			
Protection level (IP)	44		
Working temp. (°C Min/Max)	-20 ÷ +50		
Dimensions (mm)	330x195x277 h		330x210x303 h
Weight (kg)	8	11	13

DIMENSIONS

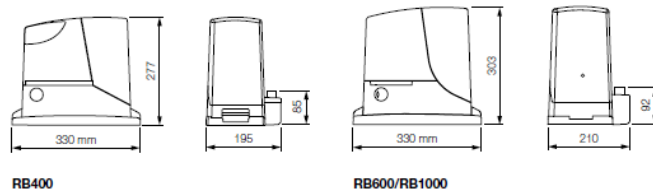

RB400

RB600/RB1000

COMPATIBILITY TABLE WITH CONTROL SYSTEMS AND ACCESSORIES

Code	receiver			transmitter						photocells						flashing light							
	Built-in*	DXBD	DXLR	EBA INTI	EBA ONE	EBA ONE BD	EBA ONE LR	EBA FLOR	NICEWAY	EPS	EPN	EPL	EPMB	EPUB	EPNOW	EPNOR	F210	F710	F210B	F710B	ELAC	ELIC	WLT
RB400	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
RB600/600P	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
RB1000/1000P	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•

* Radio receiver incompatible with Opera system