BiDi-WiFi

Pocket programming interface

BiDi-WiFi and the MyNice Pro App make installation configuration easy and efficient.

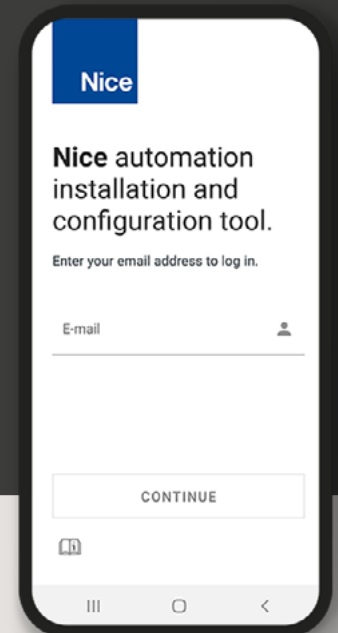**You can perform all automation programming phases even while sitting comfortably in your vehicle.**

MyNice Pro App

Android Systems:

iOS soon available

Nice automation installation and configuration tool.

Enter your email address to log in.

E-mail

CONTINUE

App

BiDi-WiFi

Pocket-sized tool,
to always have with you to
facilitate Nice automation
configuration procedures.

Nice Home A

Have
a **Nice**
day!

**Plug-in
& Go**

Plug-in, configure and go.
Easy, pocket-sized plug-in interface, compatible with all Nice automations for gates
and garage doors with Bus-T4 connector.

When the BiDi-WiFi interface is plugged in, it **automatically generates a WiFi
network allowing the automation to be configured** via the **MyNice Pro app.**
Even from the comfort of your own vehicle.

Connection

WiFi

BUS T4

Procedures guided by a **wizard** with **a description of the parameters displayed** as in an instruction manual. The **search function** lets you easily find the parameter you want to programme to complete the installation.

Dedicated **cloud** management. You can easily consult a list of **installers**, overview of **interventions**, **geolocation** via map and **statistics**, to guarantee your customers a fast and efficient service and rapid response times.

By recognising the Gate&Door control unit, Nice technology allows real time **firmware updates** and lets you **view manuals** to easily access the information on the automation throughout the intervention.

MyNice Pro App

Simple user-friendly tool to make your job easier, whether you are managing a single installation or your company's system.

Devices

Control units/Motors
Swings, sliding, sectional,...

Remote controls
Remote control, tag, card, Krono...

Radio receivers
Internal radio receivers, Plug-in radio receivers, OXI, memory

---

Configuration

Installation

Automatic actions

Maneuvers

Safety

Energy saving

Advanced parameters

Automatic closure

On

Pause Time

- 1s   40   + 1s

0 - 250s   Restore value: 30s

This parameter type is ON/OFF; the factory setting is OFF. This function enables the activation of automatic closure at the end of an opening manoeuvre in the control unit of the automation. If the function is active (ON) the automatic closure manoeuvre starts at the end of the wait time