

PATENT NO 307791
CZECH REPUBLIC INDUSTRIAL PROPERTY OFFICE


NEW 

 **FOLLOW ME SET M 8.0**

TRACKLESS TWINNED TELESCOPIC
CANTILEVER HARDWARE
SPACE-SAVING FEATURE

| FOLLOW ME M 8.0 | CODE: 1710910 | | | | | | |
|------------------|---------------|--------|--------|--------|--------|--------|--------|
| | mm; kg | mm; kg | mm; kg | mm; kg | mm; kg | mm; kg | mm; kg |
| A | 5000 | 5500 | 6000 | 6500 | 7000 | 7500 | 8000 |
| backspace | 4930 | 5330 | 5730 | 6130 | 6530 | 6930 | 7330 |
| max. weight gate | 500 kg | 525 kg | 550 kg | 575 kg | 600 kg | 625 kg | 650 kg |
| B | 1600 | 1750 | 1900 | 2050 | 2200 | 2350 | 2500 |
| C | 2300 | 2450 | 2600 | 2750 | 2900 | 3050 | 3200 |
| D | 350 | 350 | 350 | 350 | 350 | 350 | 350 |
| G | 3915 | 4290 | 4665 | 5040 | 5415 | 5790 | 6165 |
| H | 4830 | 5230 | 5630 | 6030 | 6430 | 6830 | 7230 |
| J | 370 | 370 | 370 | 370 | 370 | 370 | 370 |
| K | 645 | 770 | 895 | 1020 | 1145 | 1270 | 1395 |
| L | 7400 | 8050 | 8700 | 9350 | 10000 | 10650 | 11300 |

Valid for gate frame 80x60

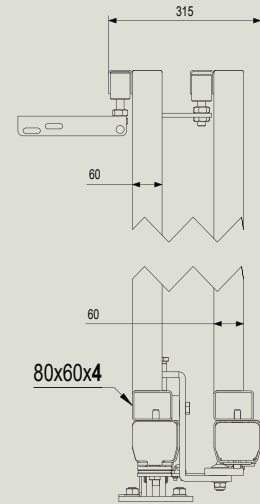

- FAST, DOUBLES SPEED OF OPENING
- SPACE SAVING FEATURE - 36% OF TAILGATE SPACE
- EASY ASSEMBLING
- TWIN «C» TRACK CANTILEVER SYSTEM
- 3 AXIS
- 32.000 CYCLES PROVEN & TESTED
- 270 g/m² HOT DIPPED GALVANIZED
- + 50°C TESTED & PROVEN
- 37°C TESTED & PROVEN
- SLOTTED HOLE PUNCHED EVERY 400mm IN TRACK
- GALVANIZED INTERNAL EDGES
- «C» TRACK SERIAL NO. 100% COMPATIBILITY CARRIAGE TESTED
- GERMAN STEEL
- 34 BOLTS 34 RIVET NUTS INCLUDED
- FOURTEEN WHEELED LINEAR CARRIAGE
- SOUTABLE FOR SINGLE GUIDE POST
- MULTI RIVETED SECTIONS
- JAPANESE ROBOTICS FANUC
- UNIVERSITY OF TECHNOLOGY - BRNO
- MADE IN CZECH REPUBLIC

